


IPT300 Handheld Payment Terminal



IPT300 from TTI is an "All-In-One" PDA payment terminal. It is well suited for retail mobile sale force team, distribution, route accounting, on-board ticketing, parking enforcement, On-the-spot billing, In-Flight sales and other credit card payment purposes. IPT300 is powered by Intel PXA270 processor to provide features such as Contact card slot, Magnetic stripe reader, 2' Thermal printer, Wireless LAN, Bluetooth, GSM/GPRS/EDGE, SD card slot and SAM (Secure Access Module) slots. MiFARE, Fingerprint Reader, Barcode, and cradle are also available as optional features. IPT300 is highly customizable to cater for customer specific needs without the additional cost.

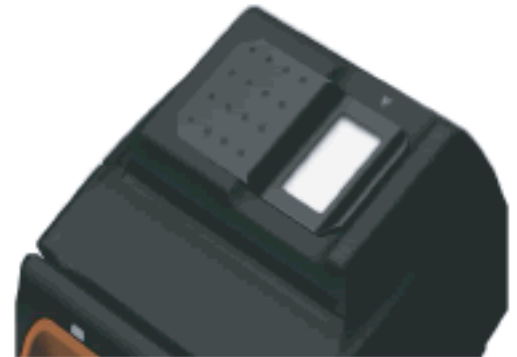

- Imobility : Versatile Communication Features
- Multi-tasking : Mobile Handheld with Multifunction
- Expandability: Various Peripheral Device
- Security : Secure Payment & Fingerprint Biometrics

RETAIL DISTRIBUTION ROUTE ACCOUNTING ON-BOARD TICKETING

PARKING ENFORCEMENT ON THE SPOT BILLING IN-FLIGHT AND DUTY FREE SALES

FEATURES & SPECIFICATIONS



Key Features

- High performance processor 520MHz
- Windows Mobile 5.0
- Color TFT LCD with Touch screen viewable under sunlight
- Certified EMV L1, L2 payment terminal
- Built-in ISO7816 Smart card slot for EMV card,
- Built-in 3 x Secured Access Module for Crypto SAM
- Optional contactless card ISO14443 A,B, Mifare
- Support built-in Finger print solution
- Built-in Bluetooth, Wireless LAN
- Quad band GSM/ GPRS/EDGE
- Built-in 2" thermal printer
- 1D laser barcode
- Optional Camera 1.3Mpxiel

CPU:	Intel PXA270 520MHz
OS:	Windows Mobile 5.0
Display:	240 x 320, 3.5' 26M Color TFT LCD
Memory:	128MB RAM, 128MB ROM
Radio:	GSM(Quadband)/GPRS and WLAN (802.11b/g)
Input:	Touch screen, Numeric keypad, Function Key
Antenna:	Internal Antenna (GSM, WLAN, Bluetooth)
Interface:	USB Host 1.1, USB Client 1.1, IrDA 1.2, Bluetooth V1.2 Class2, 3 SAMs, 1 SIM, SD Card Slot (SDIO)
Card Reader:	MSR : ISO 7810 Tracks 1, 2, 3, Bi-directions
IC Card Reader :	ISO7816, EMV L1, L2 Certified
Contactless Reader(optional)	ISO 14443 A/B and Mifare
Biometric engine:	Optical finger print scanner (optional)
Printer :	2 Inch Thermal Printer
Barcode Engine (Optional):	1D Laser or 1D & 2D (only PDF417) Linear Imager
Camera (Optional):	2M Pixels
Charging Cradle (included)	
Battery :	7.4V 2000mAh Li-ion
Accessory Adaptor,:	USB cable, Stylus-Pen
Dimension:	87 (Width) x 218 (length) x 56.2 (Thickness) mm
Weight:	510g



Global Headquarters
1581 Monrovia Ave.
Newport Beach, CA 90631
949.309.4049
sales@trijaycorp.com
www.trijaycorp.com